
LOCINOX


Industrial gates

BOLTONHD-4D

https://www.locinox.com/en-gb/gate-hardware/hinges/industrial-gates/d00000071

180° hinge which can quickly be mounted without any welding being required. It offers all advantages of the GBMU4D range: vandal-proof, adjustment of height, depth and distance between gate and post, left/right interchangeable so it can be used for both left and right turning gates. BOLTONHD-4D is available in M12 and M16.



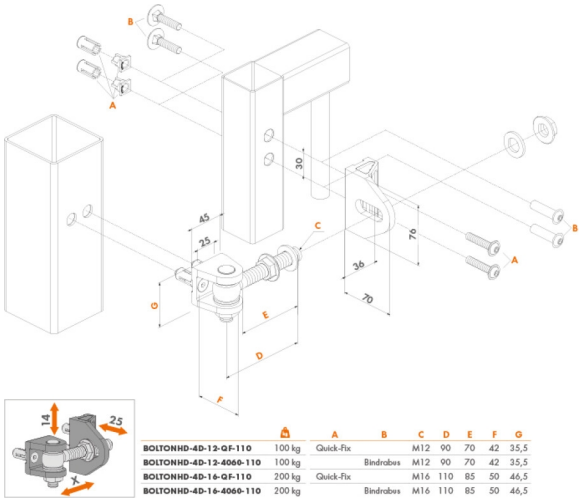

BOLTONHD-4D-12-QF-110	100 kg	Quick-Fix		M12	90	70	42	35,5
BOLTONHD-4D-12-4060-110	100 kg		Bindrabus	M12	90	70	42	35,5
BOLTONHD-4D-16-QF-110	200 kg	Quick-Fix		M16	110	85	50	46,5
BOLTONHD-4D-16-4060-110	200 kg		Bindrabus	M16	110	85	50	46,5

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Minimal Distance Gate - Post	8 mm
Gate Weight	100 kg
	200 kg
Horizontal Adjustability	51 mm
Vertical Adjustability	14 mm
Depth Adjustability	25 mm
Materials Main Part(s)	Hot Dip Galvanised Steel
	Powder Coated Aluminium
	Stainless Steel
Hours of Salt Spray Testing	500
Test Frequency	500000
Years of Warranty	3